


# URSA ACOUSTIC ROLL



**Typical applications:**



Internal walls and floors.

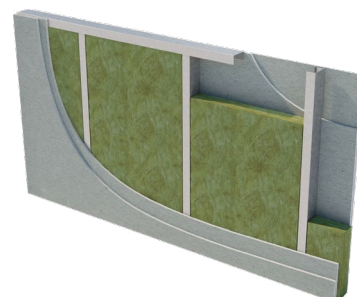

## Description.

URSA ACOUSTIC ROLL is a non-combustible glass mineral wool insulation roll. The roll is supplied at 1200mm & 2x600mm widths to allow friction fitting between common stud/joist spacings, minimising gaps at joints and reducing on-site cutting & waste.



Non-combustible



Thermal Insulation



Acoustic Insulation



Recycled Glass Content

## Application.

URSA ACOUSTIC ROLL is designed to provide both thermal and acoustic insulation for various applications, including:

- Internal walls and floors
- Timber frame party walls
- Timber and metal stud partitions
- Separating walls and floors
- Drylining systems

## Performance.

### Thermal Conductivity:

Declared thermal conductivity ( $\lambda$  value) of 0.035 W/mK.

### Density:

Manufactured at a nominal density of 22 kg/m<sup>3</sup>.

### Fire Classification:

Deemed non-combustible with a fire classification of Euroclass A1 (the highest possible rating) when tested to EN 13501-1:2018 Reaction to Fire.

# Technical Characteristics.

## Product Specification.

| Thickness (mm) | Length (mm) | Width (mm) | Pack Area (m²) | Packs per pallet | Pallet Area (m²) | Thermal Conductivity (W/mK) | Thermal Resistance (m²K/W) | Product Code |
|----------------|-------------|------------|----------------|------------------|------------------|-----------------------------|----------------------------|--------------|
| 25             | 20000       | 2x600      | 24.00          | 24               | 576.00           | 0.035                       | 0.70                       | 2138181      |
| 25             | 20000       | 1200       | 24.00          | 24               | 576.00           | 0.035                       | 0.70                       | 2138160      |
| 50             | 12000       | 2x600      | 14.40          | 24               | 345.60           | 0.035                       | 1.40                       | 2138183      |
| 60             | 10000       | 2x600      | 12.00          | 24               | 288.00           | 0.035                       | 1.70                       | 2138182      |
| 75             | 8000        | 2x600      | 9.60           | 24               | 230.40           | 0.035                       | 2.10                       | 2138184      |
| 100            | 6000        | 2x600      | 7.20           | 24               | 172.80           | 0.035                       | 2.85                       | 2138185      |

Please note that all dimensions are nominal.

## Additional Information.

### CCPI (Code for Construction Products Information).

Holds CCPI Assessment Mark.  
Certificate number: 005800185/1027.

### Vapour Resistivity.

The product has a nominal vapour resistivity of 5 MNs/gm.

### Environmental Credentials.

- The primary packaging on our products (rolls and slabs) and pallets (the shrink hood) are wrapped in low-density polyethylene (LDPE4) plastic, which contains a minimum 30% recycled material and is fully recyclable. The secondary packaging on our products (grouping rolls and slabs into modules of 3-6 packs) is low-density polyethylene (LDPE4) virgin plastic. Before recycling, please consult your local authority for guidance.
- ISO 14001:2015+A1:2024 – Environmental Management Systems (EMS) certified. Certificate number: BQA\_EMS\_C\_2016673.
- Contains no ozone-depleting substances or greenhouse gases.
- Manufactured from up to 73% recycled glass.
- Environmental Product Declarations (EPDs) for our products, detailing their overall environmental performance, are published and accessible on our website.

### Standards and Approvals.

Manufactured in accordance with:

- EN 13162:2012+A1:2015 Thermal insulation products for buildings – Factory made mineral wool (MW) products.
- EN 13172: 2012 Thermal insulation products – Evaluation of conformity.
- ISO 9001:2015 – Quality Management Systems (QMS).  
Certificate number: Q1 100 1300949.

### Certification.

- CE marked to EN 13162:2012+A1:2015.  
Certificate number: 1163-CPR-0051.

### EUCEB (European Certification Board of Mineral Wool Products).

All URSA glass mineral wool products are made of non-classified fibres and are certified by EUCEB. EUCEB is a voluntary initiative by the mineral wool industry. It is an independent certification authority that guarantees that products are made of fibres which comply with the exoneration criteria for carcinogenicity (Note Q) of the Regulation (EC) 1272/2008.  
Certificate number: BEUC-511-46-376-46.

### Handling & Storage.

The product must be stored and handled in a manner that ensures it remains clean and undamaged. It is supplied compression-packed in polythene, which provides short-term protection only. For long-term protection, store the product indoors or under a waterproof covering, raised off the ground, to prevent weather-related damage.

During construction, all exposed areas of the product must be covered at the end of each working day and during adverse weather conditions, including rain, wind, or snow. Use polythene sheeting or an equivalent protective cover to prevent water saturation. The product must not be left permanently exposed to the elements.

All URSA products are non-hygroscopic, will not rot, degrade, or sustain vermin and will not encourage the growth of mould, bacteria, or fungi.

### URSA TERRA.

Developed in 2009, URSA TERRA showcases the latest in glass mineral wool technology. Our distinctive production methods and product formulation define the character of our extensive insulation product range.



Etex UK Insulation Limited. Thistle Industrial Estate, Kerse Road, Stirling, Scotland FK7 7QQ [ursa-uk.co.uk](https://ursa-uk.co.uk)

Technical: T. 0808 1645 134 | E. [technicalursa.uk@etexgroup.com](mailto:technicalursa.uk@etexgroup.com) | Customer Services: T. 01786 451170 | E. [customerservice.stirling@etexgroup.com](mailto:customerservice.stirling@etexgroup.com)